

IBC Charger

- Suitable for all kind 12V batteries
- At least 90% efficiency
- IP65 housing
- Battery memory & autostart function
- Smart connection with the ProUser Power App



IBC15



IBC25



IBC40


	Pro-User IBC15	Pro-User IBC25	Pro-User IBC40
Art.no.	18186	18187	18188
EAN	8717809181862	8717809181879	8717809181886

Performance			
Rated charge current	15A	25A	40A
Charging efficiency	> 90%		
Stages of charging lithium	4 stages: Test, bulk, absorption & storage charging		
Stages of charging other batteries	5 stages: Test, bulk, absorption, float & storage charging		
Protection	Reverse polarity & No load short circuit protection		


Electrical			
Battery system voltage	12V		
AC input voltage	AC200 - 265V		
Battery capacity	Up to 150Ah	Up to 250Ah	Up to 400Ah
Battery type	Gel, Lead acid, AGM, lithium-ion & LiFePO4 battery		

Miscellaneous			
Communication	Pro-User Power APP		
Display	LED display		
Functions	Memory function, Auto start function, Battery repair charging mode		
Detachable clamps	Yes, rings and clamps (XT90 connector)		Yes, rings (XT90 connector)
Material housing	ABS		Aluminium
IP grade	IP65		
Certifications	CE		
Warranty	5 years		

Measurements			
Product dimensions	L208 x W115 x H59.5 mm	L255 x W115 x H60 mm	L240.5 x W132.5 x H80 mm
Product weight	1.17 kg	1.78 kg	2.25 kg
Package dimensions	L308 x W182,5 x H115 mm	L355 x W190 x H115 mm	L355 x W208 x H135 mm
Package weight	TBA	TBA	TBA

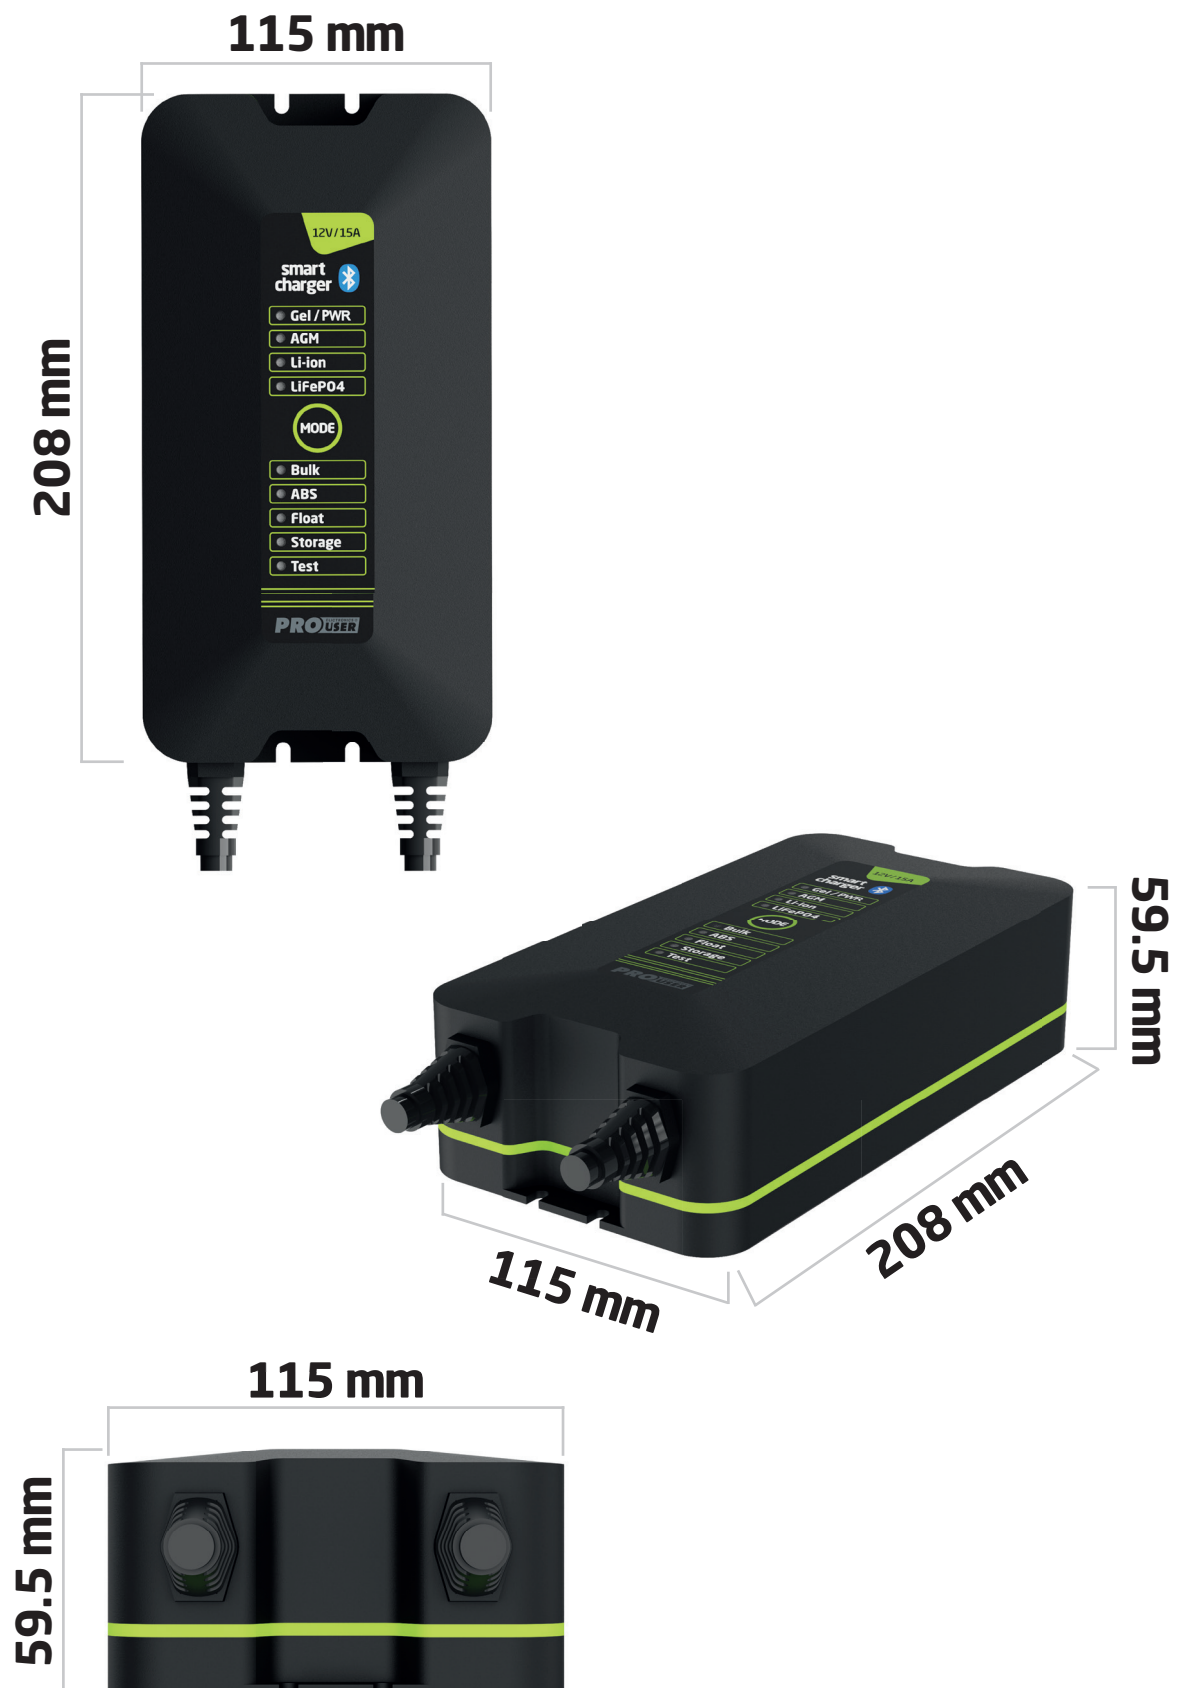


IBC Charger
IBC15

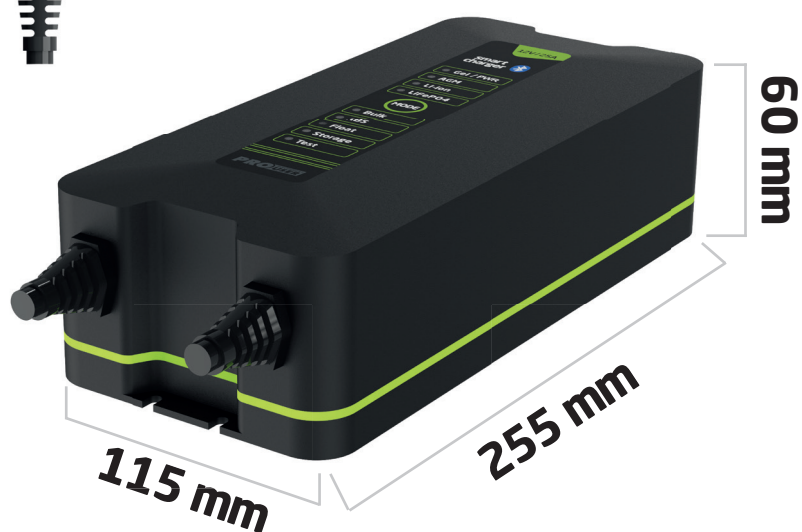

IBC Charger
IBC25

PROUSER[®] ELECTRONICS[®]

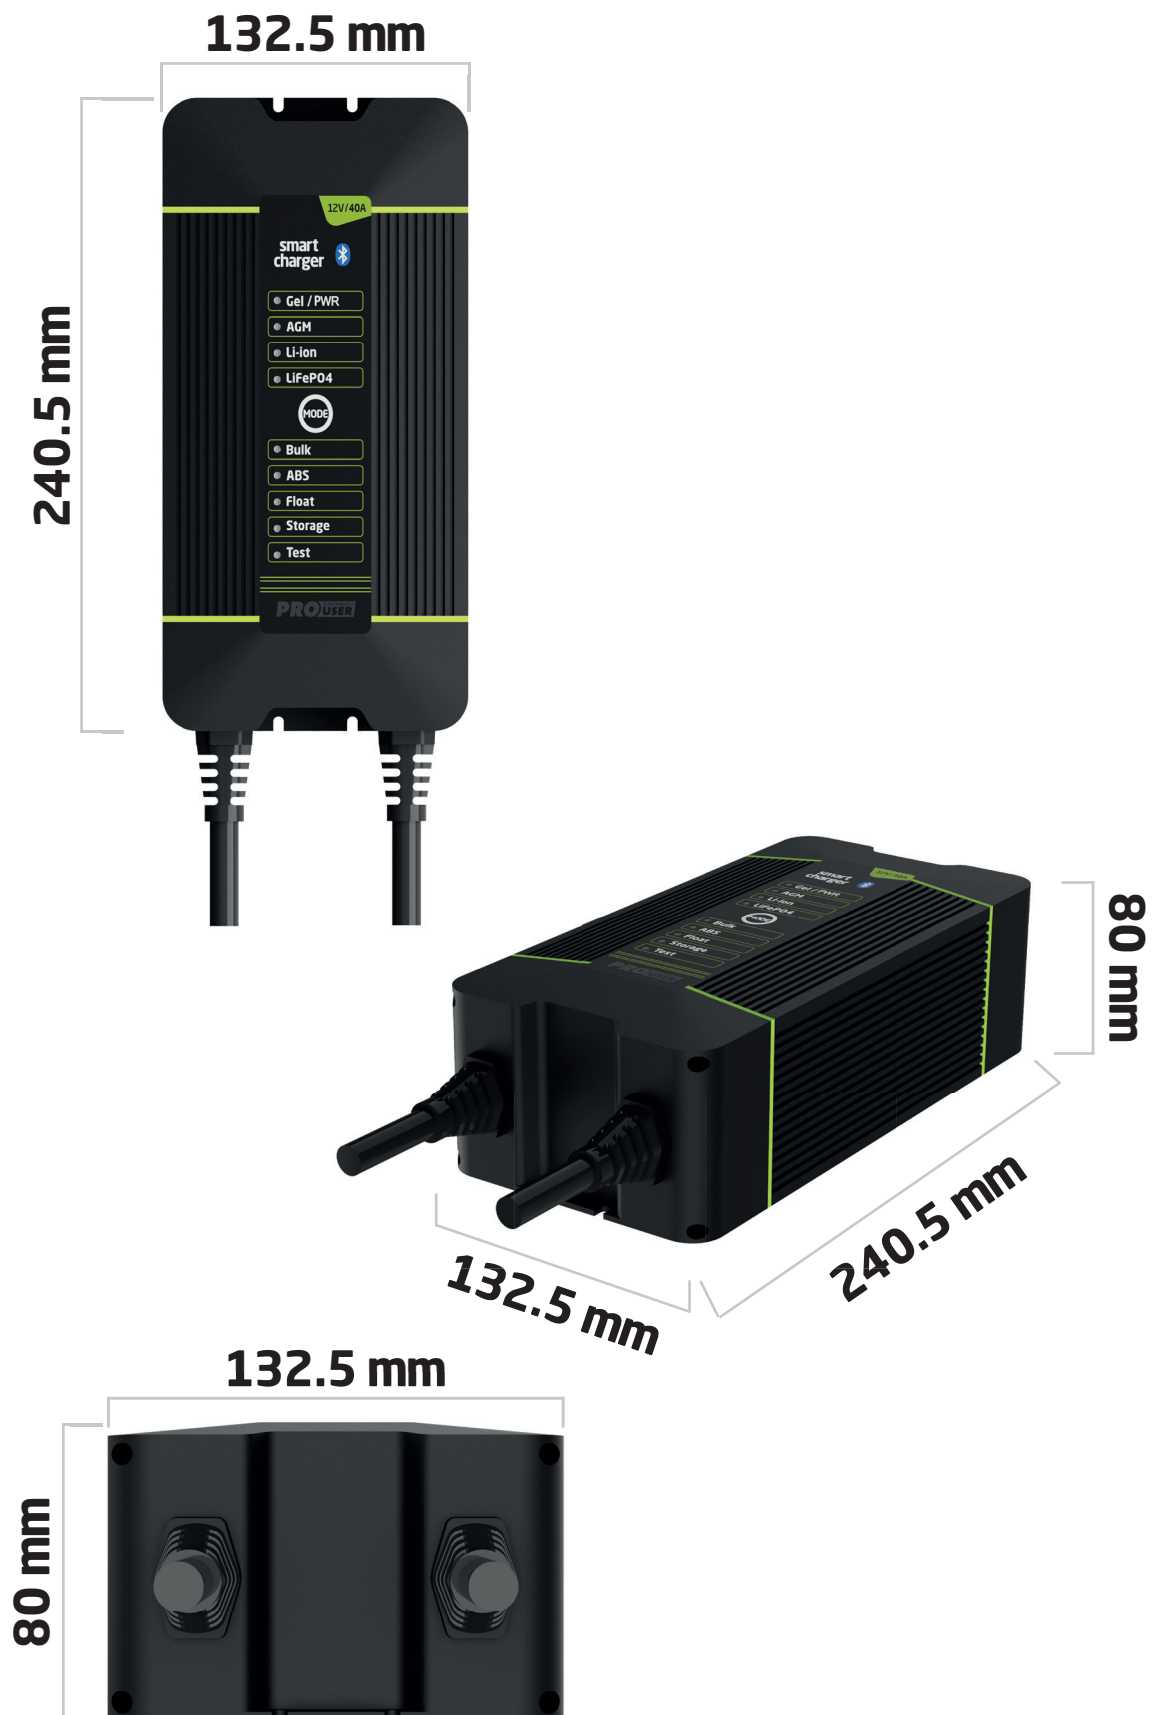

IBC Charger
IBC40